



## **StoSilco® Lastic** Silicone Modified Acrylic Elastomeric Coating

StoSilco®Lastic is a flexible, high build coating formulated with a performance blend of acrylic elastomeric emulsion and silicone modifiers to repel water and remain stable in all climatic zones. The superior elongation and flexibility of Silco Lastic allows it to bridge minor surface cracks and provide a weatherproof and vapor permeable membrane. With excellent dirt pick up resistance your property will look better over the life of the coating system.



# StoSilco®Lastic Benefits:

## Reduced cleaning and recoat maintenance

- A harder film than traditional silicone elastomerics
- Excellent dirt pick up resistance
- High permeability reduces blistering

## Long term weather protection


- Crack bridging to prevent moisture ingress
- Maintains flexibility to accommodate minor structural movement
- Withstands weather and temperature extremes

## Quality Assurance


- Time tested and proven on millions of square feet
- Flexible warranty programs




## Water Repellent

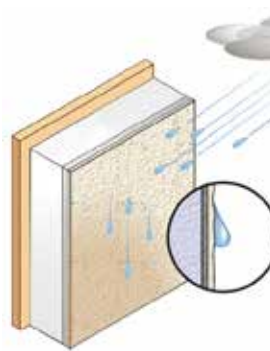

## Vapor Permeable

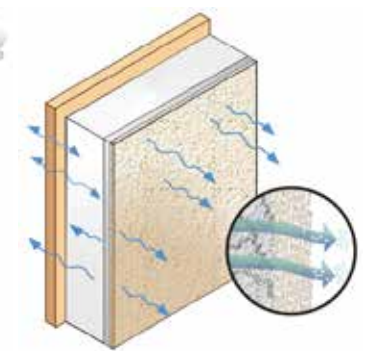

## UV Resistant



## Cleaner, Fresher, Longer



StoSilco®Lastic	
Attributes	Silicone Acrylic Elastomeric Mold resistant Resists wind driven rain (ASTM D 6904) Crack bridging (ASTM C 1305)
Recommended use	Vertical concrete, stucco, EIFS, Masonry
VOC Level (g/L)	<50
% Solids by Volume	60%
Vapor Permeability	40-60 perms (see data sheet for detail)
Dry-time: To touch/To recoat	2 hours / 4 hours @ 77°F 55% RH

This table highlights some of the key features of Sto Coat Silco Lastic. Please refer to the relevant technical data, MSDS, label instructions and Hotlines Technical Notes for full specifications, application and performance data.

Please contact your Sto Sales Representative for more information.

### Sto Corp.

3800 Camp Creek Parkway  
Building 1400, Suite 120,  
Atlanta, GA. 30331

Tel: 404-346-3666  
Toll Free: 1-800-221-2397  
Fax: 404-346-3119  
[www.stocorp.com](http://www.stocorp.com)



S811A 04 / 14

**Sto** | Building with conscience.

### ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components. STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).