


# StoColor<sup>®</sup> Acryl Plus

80648 StoColor Acryl Plus

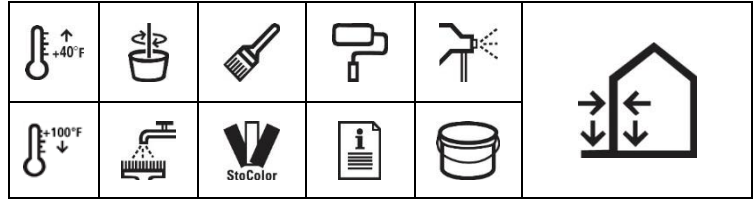

## Technical Data

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULT
<b>Resistance to Wind Driven Rain</b>	ASTM D-6904 (formerly Fed Spec TTC-555B)	Weight Gain 1 coat with primer 2 coats without primer	Pass, No water penetration <0.6 oz (0.04 lbs) <0.3 oz (0.02 lbs)
<b>Tensile Strength</b> psi (MPa)	ASTM D-412		386 (2.70)
<b>Elongation at Break</b> (%)	ASTM D-412		306
<b>Flexibility, Mandrel Bend % Elongation</b>	ASTM D-522	at 70°F (21°C) at -14°F (-26°C)	> 32 (no crack) > 32 (no crack)
<b>Moisture Resistance</b>	ASTM D-2247	14 day exposure	Pass, No Deterioration
<b>Mold Resistance</b>	ASTM D-3273	90 day exposure	Pass, No Mold Growth 85% Relative Humidity
<b>Adhesion to Concrete</b> psi (MPa)	ASTM D-4541		320 (2.20)
<b>Water Vapor Permeability</b> (ng/Pa·s·m <sup>2</sup> )	ASTM E-96 Wet-cup method	1 coat	25 (1434)
<b>Carbon Dioxide Diffusion Resistance Coefficient</b>	EN-1062		1,400,000
<b>Carbon Dioxide Diffusion Resistance</b> (m)	EN-1062		200
<b>VOC</b> (g/L)	This product complies with US EPA (40 CFR 59) and South Coast AQMD (Rule 1113) VOC emission standards for architectural coatings. VOC less than 50 g/L.		
<b>Fungal Resistance</b>	TTC 555-B		No Growth
<b>Chloride Ion Penetration Reduction</b> %	NCHRP-244 Phase 1		90.7 %
<b>Solids Content by Volume</b> (%)			53*

Typical values for material cured at 73F (23C) and 50% R.H.

\*Percent Solids by volume is approximated from change in thickness from wet application to measured dry film

Features	Benefits
----------	----------

<b>1 Acrylic Based</b>	Excellent adhesion; weather-resistant; promotes color stability; satin sheen
<b>2 Weather/Pollution-Resistant</b>	Repels water; increases service life of substrate
<b>3 Chloride Ion Screen</b>	Protects embedded reinforcing steel against corrosion
<b>4 Carbon Dioxide Resistance</b>	Significantly reduces CO <sub>2</sub> diffusion into concrete, protecting embedded reinforcing steel against corrosion
<b>5 Non-Vapor</b>	Allows substrate to breathe naturally; resists blisters caused by trapped vapor
<b>6 800 Standard Colors</b>	Increase design options; match existing colors easily
<b>7 Easily Sprayable</b>	Increases job-site productivity
<b>8 Cleans Up with Water</b>	Tools can be reused; no hazardous solvents needed; environmentally friendly
<b>9 Low VOC</b>	Safe for workers and the environment

*StoColor Acryl Plus is an acrylic-based, high performance coating that protects against weather, salts and environmental pollutants. Use it for protecting prepared vertical, above grade, concrete, stucco, EIFS, masonry, or previously painted wall surfaces. It comes in a variety of colors, and has a satin sheen, making it an easy way to improve a substrate's appearance. May also be used on horizontal concrete for light pedestrian traffic.*

### Coverage

160-200 ft<sup>2</sup> per gallon (3.9-4.9 m<sup>2</sup> per liter) per coat, applied at 8-10 wet mils (0.2 to 0.25 mm), to achieve 4.2 – 5.3 mils DFT per coat.

750-940 ft<sup>2</sup> (68-88 m<sup>2</sup>) per pail for a single coat, applied at 8-10 wet mils (0.2 to 0.25 mm), to achieve 4.2 – 5.3 mils DFT.

375-470 ft<sup>2</sup> (34-44 m<sup>2</sup>) per pail for two coats, applied at 8-10 wet mils (0.2 to 0.25 mm) per coat, to achieve 4.2 – 5.3 mils DFT per coat.

### Packaging

5 gallon pail (19 L)

### Color

800 Standard Color or Custom Color Match

### Shelf Life

18 months, if properly stored and sealed.

### Storage

Store in a dry area, between 50°F (10°C) and 85°F (29°C). Protect from direct sunlight, extreme heat [90°F (32°C)] and freezing.

# StoColor Acryl Plus

## General Surface Preparation

All surfaces must be structurally sound, clean, dry, and free of frost and surface contamination such as dust, dirt, salts, grease, oils, efflorescence, mold, algae, mildew, and any other contamination that may affect adhesion. Use appropriate repair methods for the substrate to repair pitting, spalls, cracks, peeling, blistering, delamination, weak surface conditions such as laitance, water damage, or other defects that may exist.

Pressure washing is a recommended means of surface preparation. Follow necessary safety precautions and adjust pressure to avoid damage to the underlying substrate or substrate condition. For mold, algae, and mildew removal, treat surfaces with a commercial mildew removal and/or wash product carefully following manufacturer's application and safety directions. Rinse thoroughly with clean water, and allow a minimum of 24 hours to dry thoroughly.

## Mixing

Use at a preconditioned temperature of  $70 \pm 5^\circ\text{F}$  ( $21 \pm 3^\circ\text{C}$ ). Mix undiluted product for 3 minutes using a slow-

speed drill and a mixing paddle. Mix thoroughly to a uniform consistency.

## Application

Apply only to sound and clean, dry, properly prepared, frost-free surfaces. Do not apply over damp surfaces or during rain, hail, or snow events or if rain, hail, or snow is imminent. Apply in two uniform coats by brush, roller or with proper spray equipment to prepared/primed substrate. Apply coating in a continuous application, always working from a wet edge or architectural break to eliminate cold joints. Back roll open texture surfaces such as concrete masonry. Achieve 4.2-5.3 DFT per coat. Allow sufficient time for drying between coats.

### IMPORTANT

ALWAYS check color for proper match. If color does not match, STOP-call your Sto representative. Minor shade variations may occur from batch-to-batch (refer to batch number on pail). Avoid installing separate batches side-by-side and avoid application in direct sunlight. Avoid installing new coating adjacent to weathered or aged coating. Sto Corp. will not be responsible for shade or color variation from batch-to-batch, variation caused by application or substrate deficiencies, or fading resulting from natural causes such as weather. See Tech Hotline Nos. 0694-C, 0893-EC and 1202-CF for helpful tips on prevention of color problems.

Prevent or repair leaks from roofs, parapets, windows, sealants, or other components of construction, and prevent accumulation of water inside the wall assembly during or after construction. Water accumulation behind the coating could cause damage to the coating or underlying construction.

Prepare a job site mock-up of the final coating assembly to verify aesthetics and adhesion to properly prepared/primed surfaces as specified by design professional or owner's quality assurance agent.

### Substrates and Recommended Primers:

Substrate	Min. Age	Primer	WFT (DFT)
Concrete	28d	StoPrime™ Hot	5 (2.1)
Stucco	7d	StoPrime Hot	5 (2.1)
CMU	28d	StoPrime	6-8 (2.7-3.7)
EIFS	N/A	StoPrime Sand	4-6 (1.8-2.7)
Painted	N/A	Depends on paint & its condition. Test to determine best primer	

Note: StoPrime Conditioner is recommended as a surface conditioner and supplemental component for chalking substrate conditions. Selection of primer may vary depending on actual substrate conditions such as pH, absorption, texture, and desired aesthetic look.

### Horizontal Concrete

Apply one coat, 8 – 10 wet mils by spray or roller as a prime coat to prepared substrate. Allow to dry until tack free, approximately 1-4 hours depending upon ambient conditions. Avoid applying in excess. Apply a second coat, 8-10 wet mils, and allow to dry. Spray applications may be rolled or textured (trowel, knockdown, stipple, etc.) as desired for finish effect. Allow to dry a minimum of 24 hours before exposing to pedestrian traffic.

### Curing/Drying

StoColor Acryl Plus dries within 24 hours under normal drying conditions [ $70^\circ\text{F}$  ( $21^\circ\text{C}$ ), 50% RH]. Drying time varies with temperature/humidity and surface conditions. Protect installed product from rain, freezing, foot traffic, and continuous high humidity until completely dry.

### Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

## Health And Safety

### WARNING!

Causes eye and skin irritation.

### Precautionary Statement

Wash hands thoroughly after handling. Wear protective gloves/protective clothing/eye protection/face protection.

### FIRST AID MEASURES

Eye Contact: Immediately flush eyes with plenty of water for at least 15 to 20 minutes. Ensure adequate flushing of the eyes by separating the eyelids with fingers. Get immediate medical attention.

Skin Contact: Immediately wash skin with plenty of soap and water for 15 to 20 minutes, while removing contaminated clothing and shoes. Get medical attention if irritation develops or persists.

Inhalation: If inhaled, remove to fresh air. If not breathing, give artificial respiration or give oxygen by trained personnel. Seek immediate medical attention.

Ingestion: If swallowed, do NOT induce vomiting. Call a physician or poison control center immediately. Never give anything by mouth to an unconscious person.

Store locked up.

### Spills

Collect with suitable absorbent material such as cotton rags.

### Disposal

Dispose of in accordance with local, state or federal regulations.

### Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY.

Consult the Safety Data Sheet (SDS) on [www.stocorp.com](http://www.stocorp.com) for further health and safety information.

### LIMITED WARRANTY

This product is subject to a written limited warranty which can be obtained free of charge from Sto Corp.

Refer to *Sto Specifications for more complete information on proper use and handling of this product.*

## Limitations

- Apply when ambient and surface temperatures are  $40^\circ\text{F}$  ( $4^\circ\text{C}$ ) and rising, and below  $100^\circ\text{F}$  ( $38^\circ\text{C}$ ).
- Do not apply if the surface temperature is less than  $5^\circ\text{F}$  ( $2.8^\circ\text{C}$ ) above the ambient dew point temperature.
- Do not use below grade or in areas subjected to hydrostatic pressure.
- Do not overcoat with solvent-based materials.
- Efflorescence of portland cement-based substrates such as concrete, stucco, and concrete masonry sometimes causes staining or discoloration on the surface of applied coatings. Efflorescence is neither caused nor prevented by the Sto coating.
- If used on horizontal concrete limit use to areas with light pedestrian traffic, such as private balconies.

**Sto Corp.**  
3800 Camp Creek Parkway  
Building 1400, Suite 120  
Atlanta, GA 30331  
Tel: 404-346-3666  
Toll Free: 1-800-221-2397  
Fax: 404 346-3119

**S155-80648**  
Revision Number: A6.0  
Date: 08/2018

[www.stocorp.com](http://www.stocorp.com)

### Attention

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).