


Stolit[®] Milano is a very fine, sandable and extremely workable finish for interior or exterior wall surfaces that yields more coverage than comparable products on the market. In just two to three coats, this finish can achieve multiple decorative looks, from a fine grit texture to the industrial feel of ultra-smooth metal panels. Highly breathable and mildew resistant, Stolit Milano can also be top coated to provide additional abrasion protection.




StoTherm[®] ci Mineral with an ultra-smooth Stolit Milano

Traditional Fine Texture vs. Stolit Milano Ultra-Smooth Finish



Stolit Milano is a unique surface achieved with Stolit Milano finish.

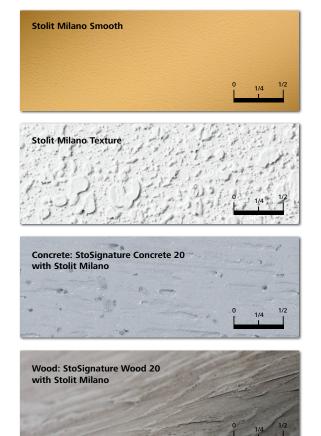

Color samples are for representation only. To confirm color choices, request a sample from your Sto representative.

Sto Americas

Sto Corp. 3800 Camp Creek Pkwy Building 1400, Suite 120 Atlanta, GA 30331 USA

Phone 1-800-221-2397 www.stocorp.com

Stolit Milano Benefits:

Exceptional Design Versatility

- Use to achieve a variety of aesthetic impressions from ultra smooth Venetian plaster or metal, to concrete and even wood when applied using StoSignature[®] application techniques
- Suitable for both interior and exterior wall applications
- Integral color of finish results in a longer lasting, more uniform look
- May be tinted in a range of colors from the Sto Color System

A More Cost-Effective, Time Efficient Application

- Easy 2-coat process to achieve an ultra-smooth exterior finish
- Provides more coverage than other 'smooth' finishes
- Low maintenance due to product's moisture resistance and vapor permeability
- May be top coated for enhanced abrasion resistance

Safe for Applicators, Gentle on the Planet

- Ready-mixed product requiring no additives minimizes waste and potential errors
- Better workability results in reduced worker fatigue
- Water based, low VOC

Easy 5-Step Application for a Beautiful, Ultra-Smooth Finish.

- Scrape or stone the base coat to remove trowel lines and other surface imperfections and remove surface dust.
- Apply StoPrime[®] uniformly by spray or roller and allow to dry.
- 3. Apply a uniform coat of Stolit Milano by trowel and allow to dry.



- 4. After the product has dried, sand any trowel lines or imperfections with 100-150 grit sand paper and remove surface dust.
- 5. Apply second uniform coat of Stolit Milano by trowel and allow to dry.

ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WAR-RANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com. Contact your Sto Sales Representative for more information. Please visit us at **www.stocorp.com** or call us toll-free at **800-221-2397**.

Scan to learn more about StoSignature

