



Building with conscience.

# StoSeal™ STPE Sealant

Premium high-movement silyl-terminated polyether sealant

Facades



Interiors



StoSeal™ STPE Sealant is a high-movement, non-sag, one-part hybrid sealant. It is durable, flexible, and highly resistant to moisture and weathering. Excellent adhesive properties provide primer-free bonding to most substrates. This low-odor, isocyanate-free sealant features best-in-class 8 g/L VOC content.



StoSeal STPE Sealant offers outstanding performance, including an industry-leading +100/-50 movement class, fast tack-free and cure times, and testing in accordance with ASTM C1382.

Sto's new sealant combines the excellent adhesion and movement capability of silicone with the flexibility and compatibility of polyether chemistry. The result is a paintable, low dirt pickup sealant that is ideal for use in new opaque wall and building restoration applications.



StoSeal STPE Sealant






## The Colors and Performance You Need

StoSeal STPE Sealant is packaged in 20-oz sausages that minimize construction waste and provide efficient installation. Eight standard colors are readily available from Sto inventory, and over 300 custom colors are offered upon request. Further, StoSeal STPE Sealant can be top coated with elastomeric coatings to suit most color requirements.

This rigorously tested sealant provides Type S, Grade NS, Use NT, T, M, G, A, Class 100/50 performance per ASTM C920. It meets Federal Specification TT-S-00230C Type II and AAMA 808.3 (Type 1) Exterior Perimeter Sealing requirements. StoSeal STPE Sealant has been tested in accordance with ASTM C1382 for use with EIFS wall systems.

StoSeal STPE Sealant is ideal for use with StoTherm® ci, StoPowerwall®, StoQuik®, StoVentec® exterior wall systems and with StoGuard® air and water-resistive barrier systems. It is suitable for panel-to-panel joints in prefabricated construction, metallic and cementitious substrates, storefront systems, interior use, concrete repair and air sealing applications.


Creativity Begins. **Sto Finishes.®**

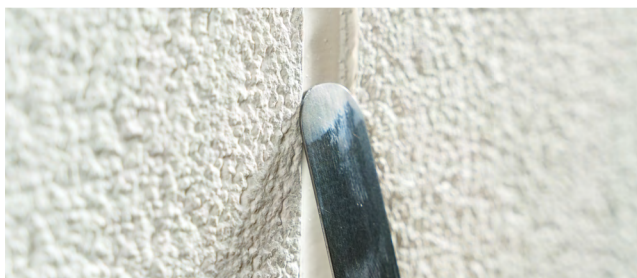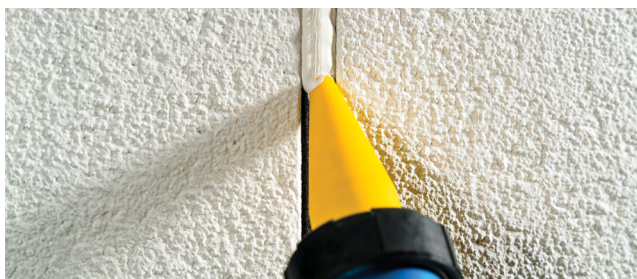


White




Off-White



Tan




Stone



Limestone



Aluminum Gray



Special Bronze



Black

### Sto Americas

**Sto Corp.**  
 3800 Camp Creek Pkwy  
 Building 1400, Suite 120  
 Atlanta, GA 30331  
 USA

Phone 1-800-221-2397  
[www.stocorp.com](http://www.stocorp.com)

#### ATTENTION

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).



To learn more about StoSeal STPE Sealant, visit: [www.stocorp.com/stoseal-stpe-sealant](http://www.stocorp.com/stoseal-stpe-sealant) or scan the QR code above.