


StoQuik® Silver DrainScreen™

Foam Aesthetic Band /Projection (Thin)

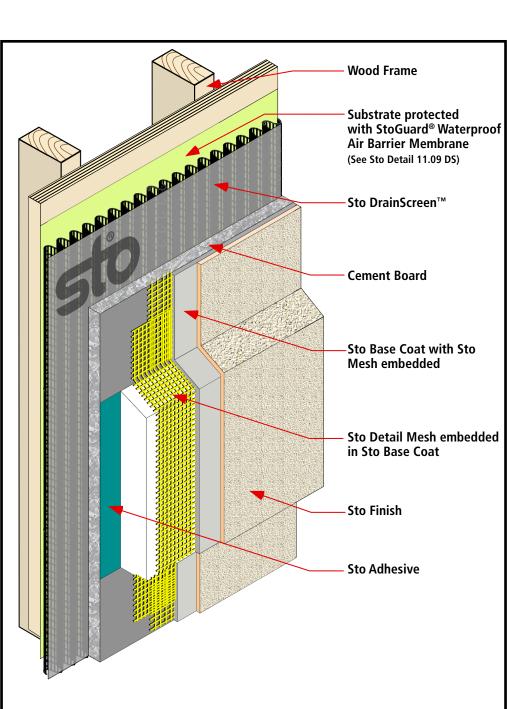

Notes:

1. The maximum thickness of foam plastic insulation allowed by code is typically 4"(100mm).

Detail No.: 11.04b DS

Date: January 2015

- 2. The exposed surface must have a minimum slope of 1:2 (27). In locations where ice and snow may accumulate, increase slope.
- 3. See Sto detail 11.04a DS where the projection is more than 2"(50mm) or where snow and ice are likely to accumulate.
- 4. Refer to Sto Specification QS 200 DS for complete information on design requirements, installation and accessories.

IMPORTANT: Components not identified as Sto are furnished by other manufactur-ers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

www.stocorp.com **ATTENTION**

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, of for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

Property of Sto Corp. All Rights Reserved.