


StoQuik® Silver DrainScreen™ Brick Mold Window Head

Date: January 2015

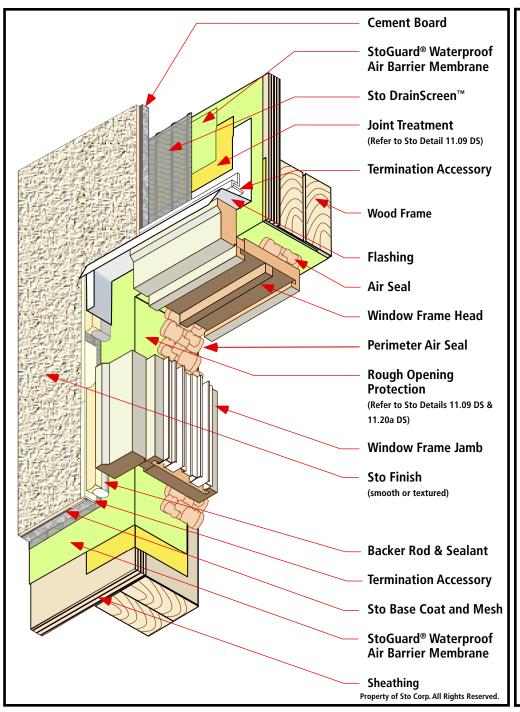

Notes:

1. Protect the rough opening from water penetration by wrapping with StoGuard® (See Sto Details:11.09 DS and 11.20a DS)

Detail No.: 11.20b DS

- Provide head flashing over the window to direct water away from the window.
 Fold flashing over the window head-jamb interface or provide head flashing end dams, depending on window type and design.
- Provide continuous air barrier around the interior perimeter of the window to reduce leaking, condensation related to air move ment, sound and insect intrusion.
- Refer to Sto Specification QS 200DS for complete information on design require ments, installation and accessories.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

ATTENTION www.stocorp.com

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, of for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.