


StoQuik® Silver DrainScreen™ Brick Mold Window Sill / Jamb

Date: January 2015

Detail No.: 11.20c DS

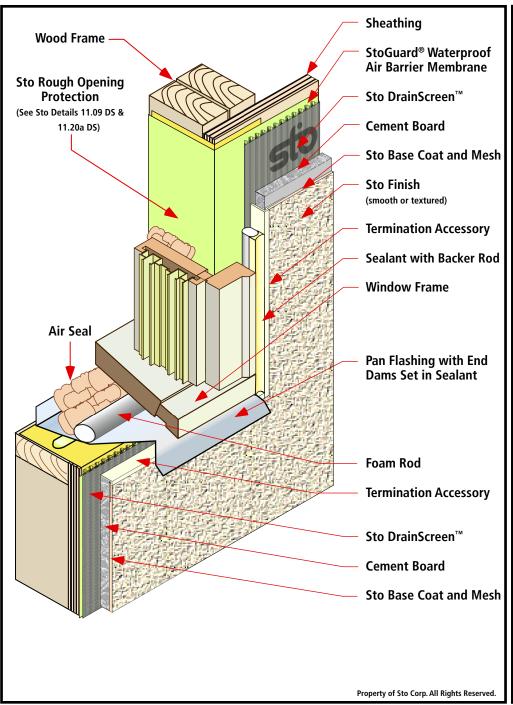

Notes:

1. Protect the rough opening from water penetration by wrapping with Sto Joint Treatment.

(See Sto Details 11.09 DS & 11.20a DS).

- 2. Direct any water penetration to the exterior at the sill pan flashing.
- 3. Lap the Sto joint treatment into the sill pan. (See Sto Detail 11.21a DS)
- Provide a continuous air barrier around the interior perimeter of the window to reduce leaking, condensation related to air movement, and sound and insect control.
- Refer to Sto Specification QS 200DS for complete information on design requirements, installation and accessories.

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

ATTENTION www.stocorp.com

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, of for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.