

Detail No.: **51.100**
 Date: **March 2021**
 Page: **1 of 2**

- Notes:**
1. StoPanel® MVES ci is an engineered insulating wall system with Adhered Masonry Veneer (AMV) – thin brick, natural stone, ceramic tile, or cultured stone. It combines superior air and weather tightness with excellent thermal performance and durability. It incorporates continuous exterior insulation and a continuous air/moisture barrier with Sto high strength masonry veneer adhesive.
 2. Install weep tubes nominal 24" apart and align with mortar joints. Extension outbound of veneer is optional.
 3. Corrosion resistant fastener with 1-1/4 inch (32mm) diameter flat galvanized steel lath-plate (legless) washer.
 4. Sto EPS Insulation Board: nominal 1lb/ft³ expanded polystyrene insulation, minimum 1 inch thick, maximum 4 inches thick, in compliance with ASTM E2430

ATTENTION


Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.
 For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

Property of Sto Corp. All Rights Reserved.

www.stopanel.com



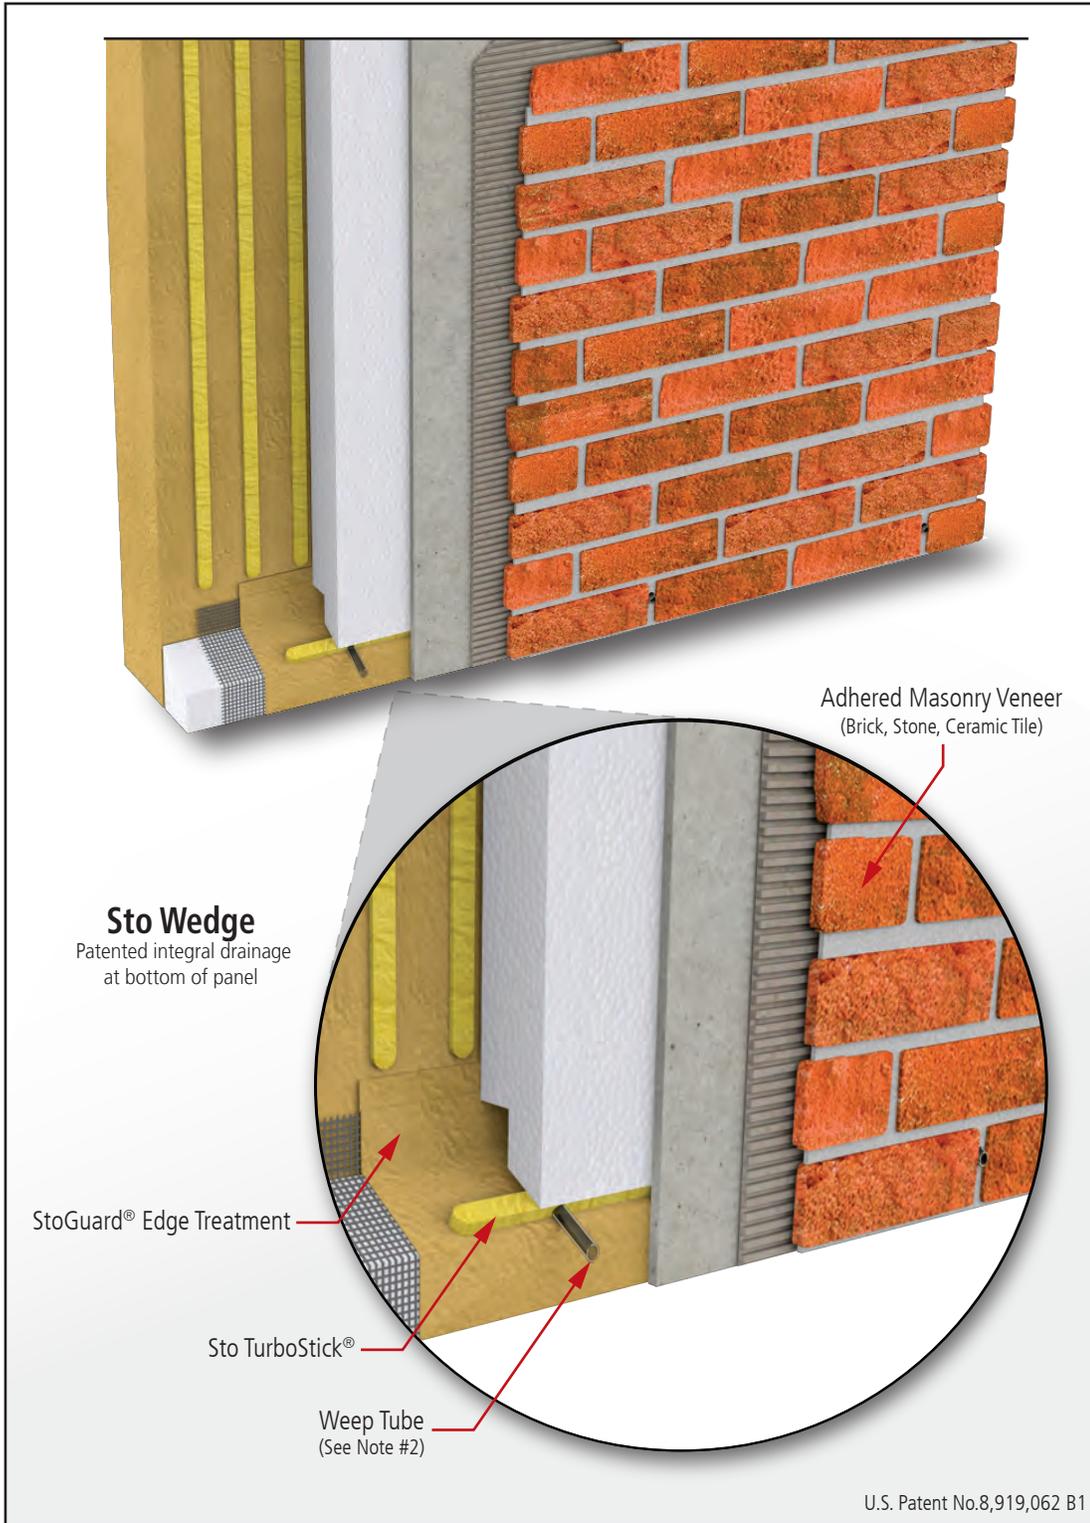

Detail No.: **51.100**
 Date: **March 2021**
 Page: **2 of 2**

Notes:

1. StoPanel® MVES ci is an engineered insulating wall system with Adhered Masonry Veneer (AMV) – thin brick, natural stone, ceramic tile, or cultured stone. It combines superior air and weather tightness with excellent thermal performance and durability. It incorporates continuous exterior insulation and a continuous air/moisture barrier with Sto high strength masonry veneer adhesive.
2. Install weep tubes nominal 24” apart and align with mortar joints. Extension outbound of veneer is optional.
3. Corrosion resistant fastener with 1-1/4 inch (32mm) diameter flat galvanized steel lath-plate (legless) washer.
4. Sto EPS Insulation Board: nominal 1lb/ft³ expanded polystyrene insulation, minimum 1 inch thick, maximum 4 inches thick, in compliance with ASTM E2430

Sto Wedge
 Patented integral drainage
 at bottom of panel

Adhered Masonry Veneer
 (Brick, Stone, Ceramic Tile)

StoGuard® Edge Treatment

Sto TurboStick®

Weep Tube
 (See Note #2)

U.S. Patent No.8,919,062 B1

ATTENTION

Property of Sto Corp. All Rights Reserved.

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, of for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components.

STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME. For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, www.stocorp.com.

www.stoperpanel.com

