


# StoPowerwall® Roof/Wall Diverter Flashing

Detail No.: 5.62

Date: December 2015

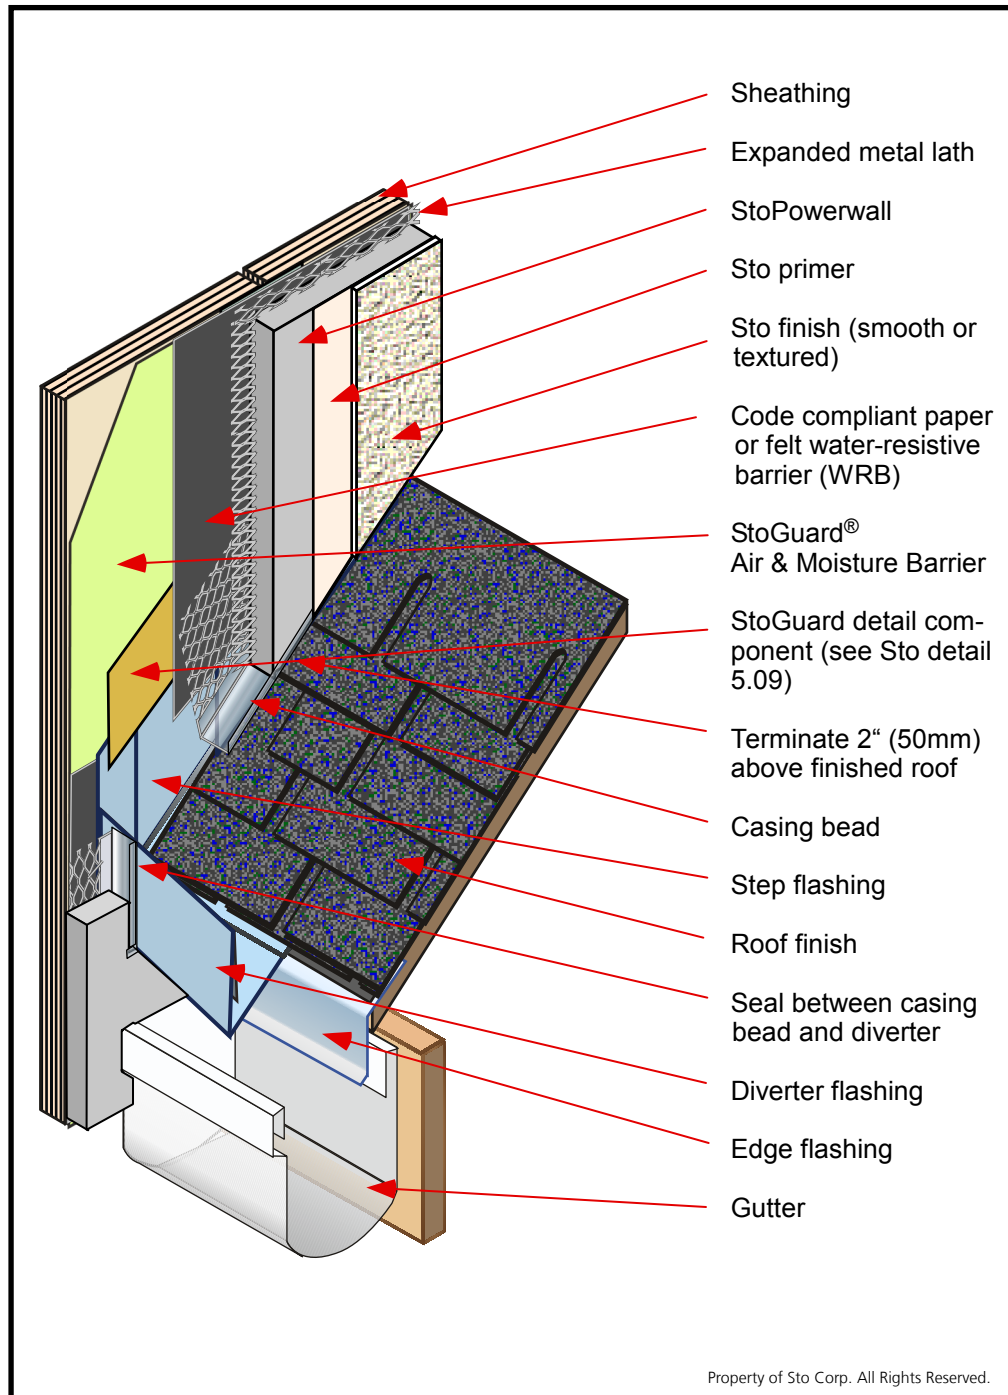

## Notes:

- 1] Install StoGuard® Air & Moisture Barrier prior to installation of flashing.
- 2] Provide step flashing minimum 4" (100mm) extending up the wall.
- 3] Provide StoPowerwall overlap of the step flashing 2" (50mm) and terminate StoPowerwall minimum 2" (50mm) above the finished roof. The space permits re-roofing at a future date and helps prevent debris from accumulating between roof and StoPowerwall.
- 4] Terminate the step flashing with a water-tight diverter (kick-out) flashing to direct water into the gutter. Refer to Sto Detail 2.62b on fabrication of a diverter flashing.
- 5] Provide a 3/8" (10mm) joint around the diverter flashing and seal.
- 6] See detail 5.01 for StoGuard product options

IMPORTANT: Components not identified as Sto are furnished by other manufacturers and are not necessarily installed by trades who install the Sto products. Refer to project specific contract documents.

## Attention

Sto products are intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. They should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of Sto products or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to Sto products, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).

[www.stocorp.com](http://www.stocorp.com)